

Value and Performance In Vehicle Weighing Applications



POWERCELL® Technology

POWERCELL GDD load cells provide accurate weighing for heavy-capacity applications such as truck and rail scales. Digital signal processing provides a higher level of weighing performance than analog load cells.



Simple Connectivity

POWERCELL GDD load cells connect through a sealed POWERCELL® Hub network. Cables are securely attached to the load cells at the factory for easy installation in the field.



Improved Diagnostics

Unlike other load cell systems, POWERCELL GDD provides diagnostic capability that makes individual load cell outputs visible from the terminal. This simplifies problem identification and repair.



Rocker Column

An integral rocker-column suspension automatically aligns the load cell for accurate weighing. A debris shield keeps the lower end of the rocker column free of debris and stones that can affect weighing accuracy.



POWERCELL® GDD™ Load Cell Kit

The load cell system uses proven POWERCELL technology that has demonstrated the ability to provide accurate vehicle weighing in demanding applications. The stainless steel construction is laser welded to provide IP68 and IP69K protection for survival in harsh environments.

Digital signal processing improves weighing accuracy and repeatability over traditional load cell technologies.

Diagnostic capabilities embedded in the load cell and scale terminal allow problems to be identified and repaired quickly. The POWERCELL GDD load cell is approved for global applications that require either OIML C3 or NTEP 10000d IIL-M approvals. The kits include the hardware required to complete a full truck scale installation.

POWERCELL GDD Load Cell Specifications

PARAMETER		UNITS	SPECIFICATION		
Trade Name			POWERCELL® GDD™		
Model Number			SLC720		
Load Cell Type			Column Compression – Digital Weight Processor (DWP)		
Rated Capacity (R.C. ¹)		t	20	30	50
Sensitivity at R.C.		d @R.C.	200,000	300,000	500,000
Communication			Controller Area Network (CAN) – Encrypted		
Communication Rate		kbit/sec	125		
Effective System Update Rate		Hz	15 with 12 cells		
Weighing Performance					
Warm-up Time from Cold Start		min	15.0		
Effect of Cable Length on System Accuracy		kg	0		
Temperature Effect on Minimum Dead Load Output		kg/°C	<± 0.8*Vmin(OIML)/5°C		
Temperature Range	Compensated	°C	-10 to +40		
	Operating	°C	-40 to +55		
	Safe Storage	°C	-40 to +80		
Humidity Effect – Continuous 100% RH		kg	0		
Barometric Pressure Effect on Zero Load Output		kg/kPa	<±1.2		
Metrology	Class		C3		
	Linearity ²	ppm R.C.	< 100		
	Hysteresis ²	ppm R.C.	< 160		
Temperature Effect on	Span ²	ppm R.C./°C	<± 13.3		
	Combined Error ²	ppm R.C.	<300		
Creep at R.C.		ppm R.C.	<± 167		
Zero Return		After 30 min at R.C.	ppm R.C. <± 167		
Non Repeatability		ppm R.C.	<± 100		
Zero Balance at 20°C		% R.C.	<± 0.1		
Diagnose (System)					
Diagnostics (system)			Individual load cell outputs visible from the terminal.		
Metrological Approvals					
European / OIML Approvals ³	Standard		OIML R60		
	European Test Certificate		TC8298		
	OIML Certificate of Conformity		R60/2000-NL1-12.53		
	Class		C3		
	nmax (OIML)		3000		
	Y ⁴	kg/kg	6061	6383	8772
	Vmin (OIML)	kg	3.3	4.7	5.7
	PLC		0.8		
	Humidity Symbol		CH (Hermetic Seal)		
	Min. Dead Load	kg	50		
NTEP Approval ³	Standard		NIST Handbook 44		
	Certificate Number		NTEP 13-010		
	Class		III L-M		
	nmax (HB44)		10,000		
	Vmin (HB44)	kg	1.2	1.8	2.2
	Min. Dead Load	kg	50		
Electrical					
Cable Length, Load Cell		m	13 (attached)		
Cable Length, Home Run		m	8 to 150 in selected pre-terminated lengths		
Cable Material	Cable, Load Cell		Double shield, 4 wires		
	Cable, Home Run		Double shield, 5 wires		
Supply Voltage Regulated in the cell	Typical	V DC	24		
	Minimum/Maximum	V DC	10 / 26.4		
Lightning Protection ⁵	Max (tested)	A	29,000		
Mechanical					
Material	Spring Element		Stainless Steel (magnetic)		
	Enclosure		Electropolished 304 Stainless Steel		
	Low-Profile Receivers		Stainless Steel (magnetic)		
	Anti-Rotation		Integral, 6-Point Hexagonal Mount		
	Cable Entry Fittings		Stainless, Laser Welded, Glass-to-Metal Seal		
Protection	Type		Hermetic (submersible)		
	IP Rating		IP68 and IP69k		
Load Limit	Safe	% R.C.	200		
	Ultimate	% R.C.	250		
Safe Dynamic Load		% R.C.	70		
Fatigue Life		cycles @R.C.	>1,000,000		
Direction of Loading			Compression (↓)		
Shipping Weight		kg	3.7	3.9	4.1

(1) RC = Rated or full capacity as specified on the data plate.

(2) The combined error of span, linearity error, and hysteresis will not exceed 80% of the error limits according to OIML R60.



(3) See certificate for complete information.

(4) Y = Emax / Vmin



(5) Tested with an IND570 terminal and Lightning Protection Kit by Lightning Technologies (NTS, Inc.). POWERCELL® is a trademark of METTLER TOLEDO.



POWERCELL GDD Load Cell Dimensions

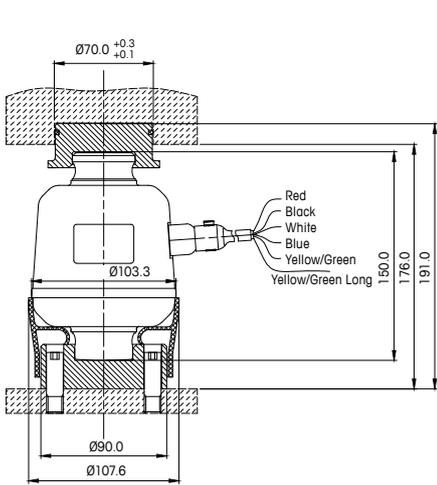

MG Kit

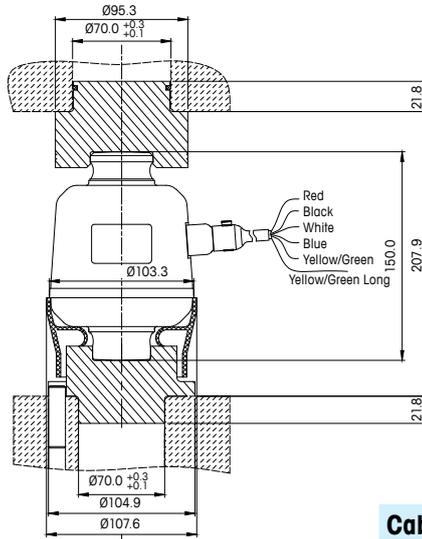

MG Kit Retrofit

Cable Color Code	
Red	VIN
Black	GND
White	CANH
Blue	CANL
Yellow/Green	CGND
Yellow/Green long	SHIELD

MG Kits with POWERCELL GDD Load Cells

Part Number	Model	Load Cell		Upper & Lower Receiver Set	Receiver Mounting Pins	POWERCELL Hub with 7 holes	Cable 9m Hub to Hub	Receiver Grease	Leveling Shim Kit
		30t Capacity	50t Capacity						
30528021	Vehicle Scale Kit 30t 2 Cell GDD H44 C3	2		2	6	0	0	0	2
30527963	Vehicle Scale Kit 30t 4 Cell GDD H44 C3	4		4	12	1	1	1	4
30527964	Vehicle Scale Kit 50t 2 Cell GDD H44 C3		2	2	6	0	0	0	2
30527965	Vehicle Scale Kit 50t 4 Cell GDD H44 C3		4	4	12	1	1	1	4

Note: Home run cable (based on the required length), Lightning Protection Kit, locating tool, and terminal are ordered separately.



MG Kits Retrofit with POWERCELL GDD Load Cells

Part Number	Model	Load Cell		Upper & Lower Receiver Set	Receiver Mounting Pins	POWERCELL Hub with 7 holes	Cable 9m Hub to Hub	Receiver Grease	Leveling Shim Kit
		30t Capacity	50t Capacity						
30527966	Vehicle Scale Kit 30t 2 Cell GDD H44 C3 R	2		2	2	0	0	0	2
30527967	Vehicle Scale Kit 30t 4 Cell GDD H44 C3 R	4		4	4	1	1	1	4
30528028	Vehicle Scale Kit 50t 2 Cell GDD H44 C3 R		2	2	2	0	0	0	2
30528029	Vehicle Scale Kit 50t 4 Cell GDD H44 C3 R		4	4	4	1	1	1	4

Note: Home run cable (based on the required length), Lightning Protection Kit, locating tool, roll pin and terminal are ordered separately.



POWERCELL GDD Load Cell Wiring (8 Load Cell System)

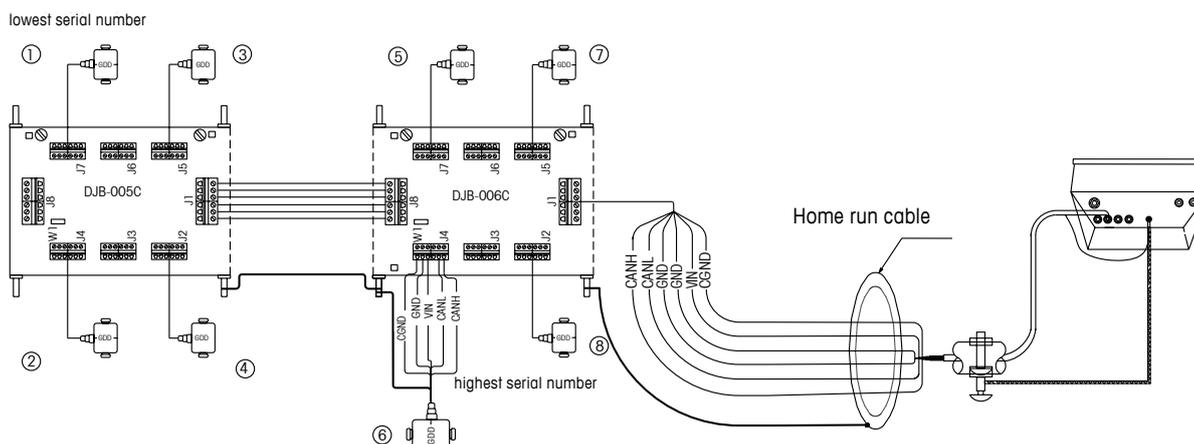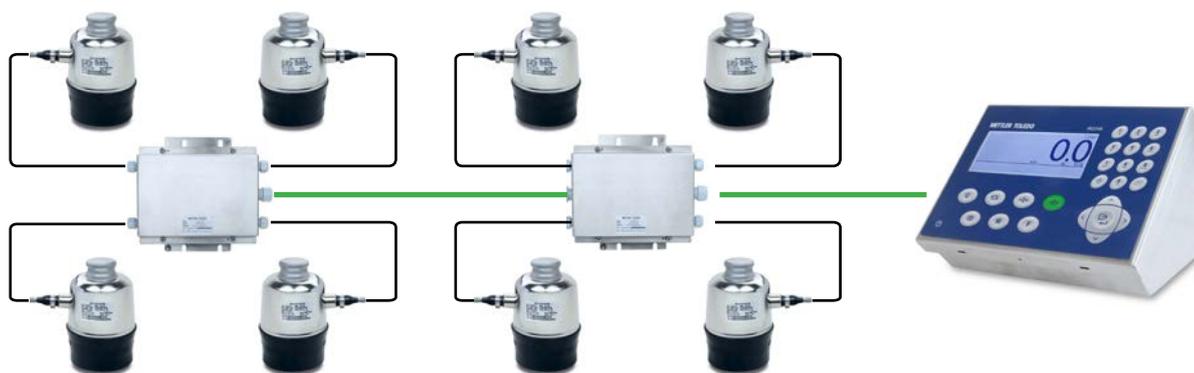

MG Kits Accessories

Part Number	Description
72260837	Cable 8m, POWERCELL Hub to POWERCELL Hub
72260838	Cable 9m, POWERCELL Hub to POWERCELL Hub
72260839	Home Run Cable, 15m, POWERCELL Hub to Terminal
72260840	Home Run Cable, 20m, POWERCELL Hub to Terminal
72260841	Home Run Cable, 25m, POWERCELL Hub to Terminal
72260842	Home Run Cable, 30m, POWERCELL Hub to Terminal
72260843	Home Run Cable, 40m, POWERCELL Hub to Terminal
72260844	Home Run Cable, 50m, POWERCELL Hub to Terminal
72260845	Home Run Cable, 80m, POWERCELL Hub to Terminal
72260846	Home Run Cable, 100m, POWERCELL Hub to Terminal
72260847	Home Run Cable, 150m, POWERCELL Hub to Terminal
30085206	Leveling Shim Kit (1, 2, 3 and 4mm)
30524777	Leveling Shim Kit Retrofit (0.5, 1, 2 and 3mm)
30038533	Locating Tool POWERCELL GDD
68004326	Receiver Grease
61043831	Lightning Protection Kit

MG Kits Spare Parts

Part Number	Description
72236271	POWERCELL GDD Load Cell, 30 ton, C3
72236274	POWERCELL GDD Load Cell, 50 ton, C3
30027472	POWERCELL Hub, DJB-005C
30027473	POWERCELL Hub, DJB-006C
30300092	POWERCELL Hub, DJB-007C_BM
72242501	Lower Receiver, POWERCELL GDD
30038535	Upper Receiver, POWERCELL GDD
30524775	Upper Receiver Retrofit POWERCELL GDD
30524776	Lower Receiver Retrofit POWERCELL GDD
61043497	Receiver Mounting Pin for MG Kits
72205972	Receiver Mounting Pin for MG Retrofit Kits
72247437	Rubber Skirt, POWERCELL GDD



Mettler-Toledo (Changzhou)
 111 West Taihu Road Changzhou
 Jiangsu 213125 CHINA
 Tel. +86-519-8664-2040
 Fax +86-519-8664-1991

Subject to technical changes.
 © 01/2021 Mettler-Toledo (Changzhou)
 Document Nr. 30524916 A
 Printed in P. R. China

www.mt.com/powercell

For more information